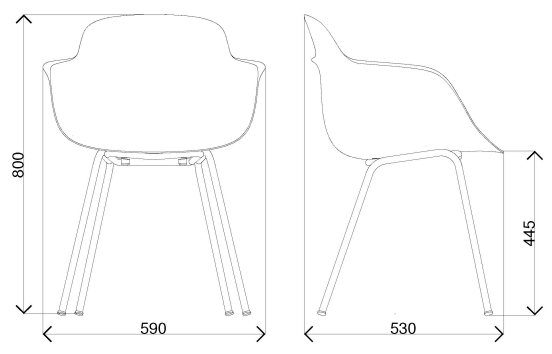Scocca *Shell*	• Polipropilene + Fibra vetro. • *Polypropylene + Glass fiber.*
Caratteristiche telaio *Frame specifications*	• Fianchi in tubo tondo diametro 18 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform. • Supporto seduta in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform. • *Sides in round tube diameter 18 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform.* • *Seat support in round tube diameter 16 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform.*
Finitura *Finishing*	• Telaio cromato con spessore medio 5 μ. • Telaio verniciato con polveri epossi-poliestere spessore medio 50 μ. • *Chrome plating with medium thickness 5 μ.* • *Painted frame with epoxy-polyester powder with average thickness of 50 μ.*
Piedini *Gliders*	• Polipropilene. • *Polypropylene.*
Optional *Optional*	• Pannello seduta in legno multistrato di faggio, spessore 5,5 mm, tappezzato. • Scocca integrale in polipropilene tappezzata. • *Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.* • *Polypropylene full upholstered shell.*